

Don't be fooled by cheap imitations - ensure your new door meets the new health and safety directives - failure to do so may result in fines or even imprisonment.

Technical Features




"ROLLADOOR" BRACKET



Each "Rolladoor" has powder coated die cast aluminium brackets with deflection rollers fitted to ensure a trouble free operation. On larger doors a sliding headplate system is used which eliminates deflection and reduces noise. On the smaller die cast endplate the double roller system has a soft rubber lead roller to ensure ultra quiet operation.



Safety brake fitted as standard to comply with health & safety directives.



Double roller system with soft lead roller for ultra quiet operation.

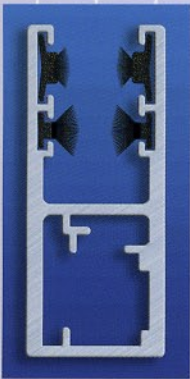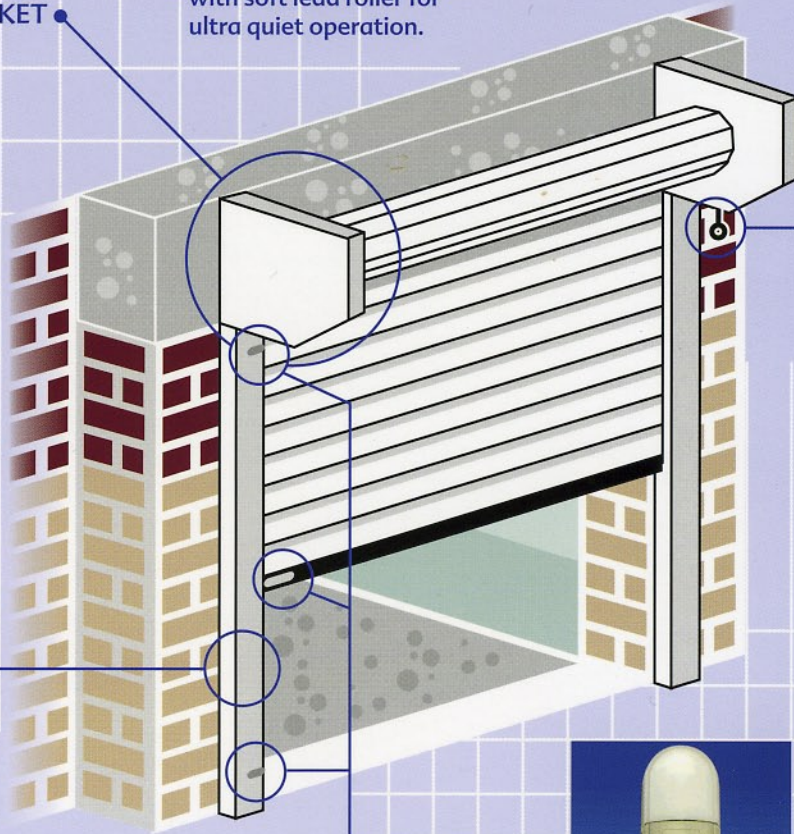

WP95 GUIDE TRACK

All guide tracks are constructed from aluminium extrusions polyester powder coated with 6 internal seal liners to ensure smooth quiet operation.



MAXIMUM SAFETY

To comply with recent health and safety/machinery directives electrically operated doors/shutters should have a safety brake and safety edge fitted as standard. Failure to comply will result in fines and possible imprisonment. All Rolladoors come complete with safety brakes and safety edges as standard ensuring you and your family are safe. Safety brakes lock off, like a seatbelt, if the motordrive or motorbrake fails, which in turn stops the Rolladoor curtain dropping at pace. Safety edges are safety devices fitted into the bottom rubber of the Rolladoor curtain. If the Rolladoor hits an obstruction on its decent then the door will automatically stop and return a few inches. To comply to these strict regulations a door should stop if it hits an obstruction.

SECURITY LOCKING SYSTEM

The "Rolladoor" comes complete with an automatic Drive Down Locking System which combines high impact polyamide links to arch back on themselves ensuring the door cannot be forced up when fully lowered. Foam Protective strips are installed to protect against template marks. Larger doors on sliding headplate system do not need locking straps, a special top profile is bolted directly to the tube which creates an anti-lift locking system.



MANUAL OVERRIDE

The motorised "Rolladoor" includes a manual override unit which enables the "Rolladoor" to be wound up manually in the event of a power failure.



REMOTE CONTROL


Each "Rolladoor" is operated by a state of the art rolling code remote control unit. Each remote control unit has two keyfob transmitters with protective covers. Each receiver has a built in courtesy light which activates when the door is activated. The remote controlled unit also has a push button panel operation and incorporates an anti-entrapment surge protector as well as an anti-lift alarm which sounds if the door is raised by intruders. (anti-lift alarm only available with the wireless safety edge)



THE ULTIMATE GARAGE DOOR

Features & Benefits

**SPECIALIST
ROLL SHUTTER
SYSTEMS**
by Warm Protection Products Limited



Safety First

Safety brake fitted as standard to comply with health & safety directives.



Roller Smooth

Double roller system with soft lead roller for ultra quiet operation.



Automatic Operation

The "Rolladoor" is operated by a remote control key fob handset with protective cover



Somfy Motors

All "Rolladoor" garage doors are powered by Somfy Motors renowned as world leaders in the motorisation markets



Locking System

This automatic locking system drives down the garage door to make it safe and secure plus comes with protective foam strips to reduce template marks




Safety Edge

Wireless state-of-the-art safety edge which stops the door if it hits an obstruction on decent



High Thermal & Sound Insulation

Door curtain made from interlocking twin wall aluminium sections containing a CFC-free insulating polyurethane foam gives great insulation from both noise and the elements



Brush Lined Tracks

Our tracks are neoprene and brush lined as standard which dramatically cuts down noise when in operation and on draughts, with a total of 6 seals



Weatherproof

Our bottom rubber section which incorporates a safety edge unit



Receiver & Courtesy Light

Stylish interior remote control receiver with built in light that turns on automatically when you operate the garage door. Complete with state of the art rolling code technology. Manual push buttons on lid and anti entrapment surge unit and anti lift alarm

Guarantee

GENERAL WARRANTY

Rolladoor, electric operators, spares and accessories are warranted against manufacturing defects for a period of two years from the date of purchase.

ADDITIONAL PERFORMANCE GUARANTEE

The paint finish can be expected to provide weatherproof membrane, i.e. will resist perforation of steel substrate due to corrosion from the weatherside. Any fade of colour change shall be limited and uniform given equal exposure to the local environmental conditions.

The guarantee applies to the weatherside of the door curtain only and is subject to the following conditions:

1. The garage door must be free of impact or mechanical damage, scratches, tears, scuffs or other surface abrasions.
2. Surfaces must be freely exposed to washing by rainfall and kept clear of bird droppings, accumulated dirt and debris.
3. The guarantee applies only to the weatherside and where more than 5% of the surface area of any one door is affected. Corrosion, discolouration or other effects arising from elements within the building or from abnormal pollution or contact with aggressive fumes or chemicals are excluded.
4. The guarantee begins at the time of first delivery of the product by Warm Protection Products Limited.
5. This guarantee is valid for doors sold in the UK and Rol only.
6. In the event of a justifiable and agreed claim the company may replace the door or offer a refund at its sole discretion. Any refund will be limited to a maximum value equivalent to the list price of the door applicable at the time of purchase.
7. Small template marks may appear on the inside of the top section of the Rolladoor curtain, where the locking straps appear, this is normal and will not interfere or damage the door are void from guarantee.
8. Wearing of the Rolladoor curtain may appear and be visible when the Rolladoor curtain is fully open. This wear is due to the lead in of the curtain in the guide tracks. The wearing is common and will not result in a defect of the shutter door. The wearing down of the paint to the aluminium will not result in further damage and is seen as general wear and tear. This wear and tear is hidden within the guide tracks when the Rolladoor is fully lowered. This wear and tear will not be taken as a fault on the door and the Rolladoor curtains will not be replaced if these marks appear.

All other parts of the door are guaranteed against manufacturing defects for a period of two years from date of purchase.

PLEASE NOTE:

In line with Warm Protection Products Limited's policy of continuous product improvement, we reserve the right to make changes without prior notification. Whilst every effort has been made to provide an accurate representation, colours shown in this brochure are for illustrative purposes only and may vary from the product received.



Your nearest authorised distributor is:



WarmProtection
PRODUCTS LIMITED

Specialist Manufacturers of Roll Shutter Systems
Unit 5, Throckley Way,
Middlefields Industrial Estate, South Shields,
Tyne & Wear. NE34 0NU.
Tel: 0191 455 9707 Fax: 0191 427 6855